

10.1 inch TFT LCD USB Powered monitor

- 10.1 inch TFT LCD, Widescreen
- Touch function optional
- 4-wires resistive touch panel (USB Touch as standard)
- With speaker build-in
- USB input
- 1024 x 600 resolution
- 200cd/m² brightness / LED Backlight
- Hidden Bracket / VESA 75mm Holes



1024x600 resolution



LED backlight



4-Wires resistive




USB

FEATURE

Hidden Bracket & Hidden USB Input



VESA 75mm Mount Holes Speaker Built-in

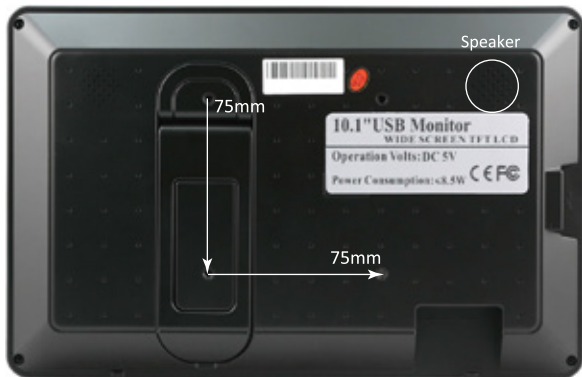

SPECIFICATIONS

Model No.	CL1011N (Without Touch Function) CL1011NT (4-Wires resistive touch)	Viewing Angle	140°(H) / 110°(V)
Description	10.1 inch USB Powered LCD Monitor	Support OS(Displaylink Program)	Windows / MAC OS
LCD Size	10.1 inch	Power input	USB DC5V
Signal Input	USB 2.0 input x 1	Power consumption	≤10w
Resolution	1024x 600	Work temperature	-20~60 °C
Backlight	LED	Store temperature	-30~70 °C
Dot Pitch	0.21525(W) x 0.21525(H) mm	Size(mm)	254×163×27mm
Active area	220.416(W) x 129.15(H) mm	Weight	665g
Brightness	200cd/m ²	Certification	FCC, CE, RoHS
Contrast	500:1	Warranty Time	12 months
Aspect Ratio	16:9	Accessories	USB Cable, 5V DC Adapter, Touch pen (for touch), Drive CD (for touch), Manual
Speaker	x 2 (built-in backside)		



One USB Cable does it all! Not need Power adapter, not need VGA etc.

Displaylink Chip, support Windows OS, MAC OS.



Duplicate



Extend



Primary Monitor