



8 inch 4:3 USB Powered LCD Monitor


- 8 inch 4:3 TFT LCD
- Touch function optional
- 4-wires resistive touch panel (USB Touch as standard)
- Without Speaker
- USB input & USB output
- 800 x 600 resolution
- 250cd/m² brightness / LED Backlight
- Hidden Bracket / VESA 75mm Holes




800x600
resolution




LED
backlight



4-Wires
resistive



VESA
75mm



USB

FEATURE

Hidden Bracket & Hidden USB Output

- Hidden Bracket, can make this monitor stand alone.
- Possible to connect with Keyboard, Mouse, Wireless Headphone etc through USB output.




VESA 75mm Mount Holes



SPECIFICATIONS

Model No.	CL8601N (Without Touch Function) CL8601NT (4-Wires resistive touch)
Description	8 inch 4:3 USB Powered LCD Monitor
LCD Size	8 inch
Signal Input	USB 2.0 input x 1
Signal Output	USB 2.0 output x 1
Resolution	800x 600
Backlight	LED
Dot Pitch	0.0675(W) x 0.2025(H) mm
Active area	162.0(W) x 121.5(H) mm
Brightness	250cd/m ²
Contrast	500:1
Aspect Ratio	4:3

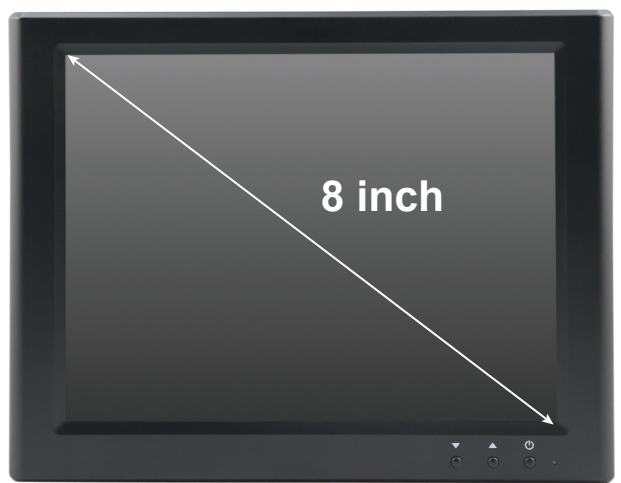

One USB Cable does it all! Not need Power adapter, not need VGA etc.

Displaylink Chip, support Windows OS, MAC OS.



Duplicate



Extend



Primary Monitor

Viewing Angle	140°(H) / 120°(V)
Support OS(Displaylink Program)	Windows / MAC OS
Power input	USB DC5V
Power consumption	≤5.5w
Work temperature	-20~60 C
Store temperature	-30~70 C
Size(mm)	200(L) × 156(W) × 25(H)
Weight	350g
Certification	FCC, CE, RoHS
Warranty Time	12 months
Accessories	USB Cable, Drive CD (for touch), Manual